GALLERY® STEEL garage doors



America's Favorite Garage Doors®






GALLERY® STEEL

The Gallery® Steel three-layer construction provides exceptional strength, energy efficiency and dent resistance as well as a beautiful carriage house appearance. The 2" or 1-3/8" thickness of Intellicore® polyurethane or bonded polystyrene insulation and thermal break makes these doors heat and cold resistant while the tongue-and-groove joint helps seal out wind, rain and snow. Available in short and long panels with multiple window options, the three-layer Gallery® Steel is virtually maintenance-free, so the first fabulous impression becomes a lasting impression.



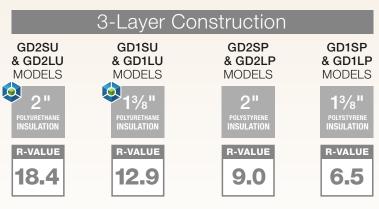

intellicore* insulation technology

Warmer. Quieter. Stronger.

Gallery® Steel garage doors featuring Intellicore® insulation technology represent the ultimate smart choice for homeowners.

Clopay's Intellicore® insulation is a proprietary polyurethane foam that is injected into a garage door, expanding to fill the entire structure. The result is a door with incredible strength and durability. Its dense insulation also produces a quieter door, and with one of the industry's leading R-values of 18.4, it provides year-round comfort and improved energy efficiency. Smart, indeed.



COLORS



- Exterior steel on standard color doors has a natural woodgrain texture.
- Doors can be painted to match the home's exterior using a high-quality latex exterior paint.
 Do not use oil-based paint.
 - *Popular in select markets, Glacier White is a brighter white.
 - † Additional charges apply.
 - Due to the printing process, colors may vary.

CUSTOM PAINT OPTION



Color Blast® finish offers more than 1,500 Sherwin-Williams® color options to complement your home. Clopay's durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

ULTRA-GRAIN® FINISH OPTION



Ultra-Grain® Oak Medium Finish



Ultra-Grain® Oak



Ultra-Grain® Oak Walnut Finish



Ultra-Grain® Oak Slate Finish

- Painted steel surface simulates a real stained door without the need of staining and the ongoing maintenance of wood.
- Oak woodgrain runs horizontal on stiles and vertical on panels for an authentic, natural look.
- Available in Medium, Dark, Walnut or Slate finishes that complement Clopay Entry Doors, shutters and other exterior stained wood products.
- Exterior steel surface on an Ultra-Grain® finish door has a stucco texture to create a more natural woodgrain appearance.
- Window frames, grilles and inserts are color matched to coordinate with the Ultra-Grain® finish patterns. All window options are available.

Additional charges apply.

SHORT PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

HEIGHTS

7'0"-8'0"

Illustrations simplified for clarity

10'6"-12'0'

7'8"-10'0"

9'0"-10'0"

MODELS GD1SP, GD1SU,

GD2SP AND GD2SU WIDTHS 6'2"-7'6 7'8"-10'0" 11'6"-14'6" 14'10"-19'0' 19'2"-20'0' ARCH1 Long Top Section 11 Plain Short Vertical Grille 4411 | 11hr | 4411 | 11hr on ARCH1 Grille on ARCH1 Plain Long 441 No. 441 No. REC12 ARCH2 REC14 Vertical Grille ah ah ah ah on ARCH2 SQ22 Grille on ARCH2 ======== SQ24 ARCH3 Trenton® Short† Vertical Grille HOO HEE ORE DOG DOG DOG HEE HEE on ARCH3 Trenton® Long† Grille on ARCH3 000000 000000 000000 000000 000000 000000 (man) Kristin® Short† Clayton™ Short† 40 40 40 40 00 00 00 00 Kristin® Long† Clayton™ Long[†] 000000 000000 Wrought Iron Short*† Wrought Iron Arch*† 36 36 36 36 58 98 98 98 98 98 98 ഞ്ഞ് ഞ്ഞ ক্রিকে ক্রিকে ক্রিকে Wrought Iron Long*1 PER PER

^{*}Acrvlic

[†]Complements Clopay Entry Door glass.

LONG PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

10'6"-12'0"

7'8"-10'0"

9'0"-10'0"

7'8"-10'0"

MODELS GD1LP, GD1LU, GD2LP AND GD2LU HEIGHTS 7'0"-8'0" WIDTHS 7'8"-10'0" 11'6"-14'6" 14'10"-19'0" 19'2"-20'0"

Short Top Section			ARCH1		
Plain Short			Vertical Grille on ARCH1		
Plain Long			Grille on ARCH1		41 lb 41 lb
REC12			ARCH2		
nLO12			ARUNZ ————————————————————————————————————		
REC14			Vertical Grille on ARCH2		
SQ22			Grille on ARCH2		
SQ24			ARCH3		
Trenton® Short†		### ### ### ### ### ### ### ### #### ####	Vertical Grille		
		Marie Barrie Bar	on ARCH3		
Trenton® Long†		00000 00000 00000 00000	Grille on ARCH3		
Kristin® Short†			Clayton™ Short†		
Kristin® Long†			Clayton™ Long†		000000 000000 000000
Wrought Iron Short*†			Wrought Iron Arch*†	63660 63660	ক্রিকে ক্রিকে ক্রিকে
	Many Many Many Many				
Wrought Iron Long*†					

*Acrylic

[†]Complements Clopay Entry Door glass.

Windows





ARCH1

STATE STATE Vertical Grille on ARCH1







Vertical Grille on ARCH2

Grille on ARCH2











Trenton® Short*









Trenton® Long*



Clayton™ Long*







Wrought Iron Long*



Wrought Iron Arch*

Acrylic windows require special cleaning. Never use products that contain ammonia or petroleum products to clean acrylic. Please visit www.clopaydoor.com/acrylic for complete details.

*Complements Clopay Entry Door glass. Long and short windows may be used in any Gallery® Steel 3-layer model. Double-strength glass is standard. Optional obscure, 3/4" insulated and 3/4" insulated obscure glass is available on all Gallery® Steel 3-layer models. Additional charges for optional glass apply.

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs. Clear acrylic also available.







Seeded



Obscure



Additional Features



Large authentic arch window designs, Ultra-Grain® finish window frames, grilles and inserts are color coordinated to Medium, Dark, Walnut and Slate finishes.



2" thick polystyrene doors and all Intellicore® polyurethane insulation doors come standard with 10-ball nylon rollers and heavy-duty 14 gauge steel hinges.



Energy-efficient thermal break. Polyurethane model shown.



- Hot-dipped galvanized steel interior and exterior skins with a baked-on primer and top coat help ensure a virtually maintenance-free door with long-lasting beauty.
- Replaceable vinyl bottom weatherseal in a rust-resistant aluminum retainer helps seal out the elements.
- 2" thick polystyrene doors and all Intellicore® polyurethane insulation doors comply with 2015 IECC air infiltration requirement of 0.40 cfm/ft² or less (IECC, Section C402.5.2).
- See your Clopay Dealer for WINDCODE® door availability.

Warranties









Decorative Hardware

STANDARD



Note: Decorative hardware options vary hased on door widths. Standard hardware is not provided if a lock is chosen. See your Clopay Dealer for details.

Operable

L-Keylocks

Operable

T-Keylock

Escutcheor Plates

OPTIONAL





(Complements

Spade Lift Handles

and Spade Step Plate)





Colonial Lift

Colonial Strap Hinge*1



† Aluminum construction *Door may not open properly if installed near the top depending on opening dimensions and lift type. See your Clopay Dealer for more details.

Environmental Assurance

Clopay doors are compliant with environmental laws and regulations. Clopay doors do not contain HFCs. All Clopay doors are compliant with:

- California SB 1013
- New Jersey A-5583/S-3919 Greenhouse Gas Bill
- Washington HB 1112 Hydrofluorocarbon Greenhouse Gas Emissions
- Canadian regulations amending the ozone-depleting substances and halocarbon alternatives regulations



MADE IN USA

Visit clopaydoor.com or call 1-800-2CLOPAY (225-6729) for more information on Clopay, America's Favorite Garage Doors.

















imagine



© 2021 Clopay Corporation. All rights reserved. RSDR-GALLERY3LAYERSS-10 REV0421